

# IQ:130XV

## Dual all-in-one Compact Zoom Camera

*Incorporating full HD images, motorized 10x zoom, high speed ANPR recognition and maxIRange™ pulsed IR lighting in one efficient unit, the MAV IQ:130XV lane camera forms an integral part of the IQ range. Vertical mount Enables the camera to be installed inside Narrow spaces such as a bollard.*



# IQ:130XV



### Single Lane

High resolution images providing excellent recognition



### Zoom Cameras

Fully controllable truEZoom™ for the perfect field of view



### Night Images

Overview camera can be synchronised with internal IR



### Powerful Pulsed IR

MaxIRange™ for true day/night number plate recognition



### Integrated ANPR Engine

To provide high accuracy reads with meta data



### Eco Power / PoE+

Low power consumption, optionally powered from 802.3at PoE+




### JSON Web Services

Simple integration into applications using open interface



### Easy Installation

Full setup using web browser with live video

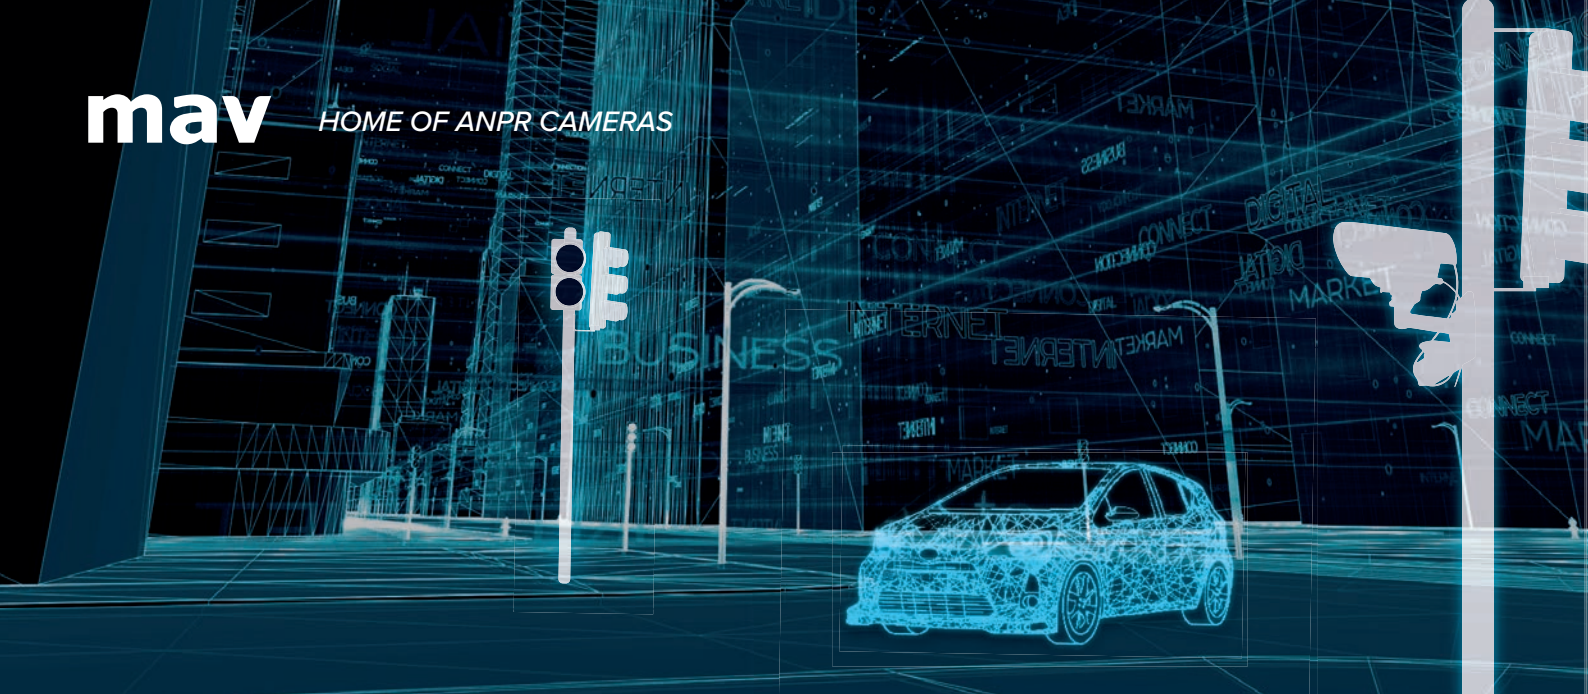

## Vertical Mount IQ Single Lane

The MAV IQ:130XV Single lane camera provides recognition up to 4m lane width for detection of plates and is simple to set up with truEZoom™ for perfect field of view at distances from 5m up to 15m.

The high definition global shutter ANPR camera module is synchronized to upgraded infrared (IR) pulsed LEDs to offer superior license plate recognition to match the increased capture resolution on offer.

By performing the ANPR recognition within the camera network traffic is massively reduced. Real time recognition is performed on raw high definition images at full frame rate and will work for all traffic speeds from high speed highway gantry systems to access control.

The IQ range incorporates high grade processing within the unit to give industry leading ANPR accuracy. Extensive metadata is provided for each plate read to offer application developers everything needed to determine plate characteristics, direction of travel and provide cropped overview and plate patch images. All this is available from the internal server using open standard JSON web services.



# MAV IQ:130XV Specification

The MAV IQ:130XV is a short range 5-15M camera.

## Specifications

Recognition Range	Capture of up to 4m of traffic lanes from 5m to 15m based on 850nm IR on EU retro-reflective plates
Motorised Zoom	ANPR: 1/3" 1920(H) x 1080(V) 16:9 global shutter, 25 fps Overview: 1/3" 1920(H) x 1080(V) 16:9 rolling shutter (global optional), 25 fps
Shutter / Iris	ANPR: motorized zoom (4-12mm or 8-22mm), focus and p-iris control Overview: motorized zoom (4-12mm or 8-22mm), focus and auto DC iris (p-iris optional)
Image (ANPR and Overview)	4 pulsed LED arrays with lenses (850nm standard. White light, 740nm or 940nm optional)
IR illumination	IR: Bandpass matched to LEDs OV: Day/Night IR Cut Filter (auto/manual)
Low Light	Integrated web server provides full camera and illuminator setup pages and live preview from any connected browser (no plug-ins required)
Optical Filters	IR: Bandpass matched to LEDs OV: Day/Night IR Cut Filter
Camera Control	Integrated web server provides full camera and illuminator setup pages and live preview from any connected browser (no plug-ins required)

## ANPR Engine Functionality

ANPR Processor	Dual Core DSP with co-processor and two channel internal parallel video input
ANPR Software / Presets	ANPR license and configuration upload via web based configuration pages for simple remote management
ANPR Engine Protocol	JSON web services provide full access to overview and plate patch images and metadata as push or pull messages for easy integration into applications (O/S independent) and via web pages
ANPR Metadata	Multiple plate tracking with IDs, full availability of plate movement/size data through field of view
ANPR Features	Options for dual read colour and IR, Image cropping options for Overview image, advanced de-skew and yaw correction, character spacing validation, country of origin matching

## Physical Specifications

Operating Voltage	PoE+ (803.2at type 2) or 12 volts DC
Network Connections	10/100 Base-T physical
Power Consumption	Nominally 12W
Size (WxHxD)	Vertical mount 138 x 57 x 148 mm (W x H x D) - excluding brackets/sunshield/cable
Weight	1.5kg excluding mount and sunshield
Enclosure	IP68 hermetically sealed. Hard anodized aluminium with mount options
Temperature / Humidity	-30°C to 55°C operating with relative humidity 0%RH to 100%RH (hermetically sealed)

## Service

Customer Service	Friendly, helpful service for product ordering and repair returns
Technical Support	Comprehensive pre and post-sale technical support for full life of the product
Warranty	12 month warranty, extended warranties and factory repair/replacement programmes available
Long Term Supply	Complete support for the life of the product
Quality Management	MAV operate a quality management system complying with ISO 9001:2000
Long Term Supply	Comprehensive product training programmes for customers